Chester County, South Carolina

Office of Purchasing
1476 J.A. Cochran Bypass
Chester, SC 29706

Addendum #1

August 2, 2018

RFP 1819-01 Bathroom Renovations - EMA

Questions and Answers:

1. What are the sizes of the shower area? Showers are basically 3’ L x 3’ W x 7’ 2” H.
2. Who does the waterproofing? Tile installer will do the waterproofing.
3. What are the walls & floors made of? Outer walls are concrete block and studs for interior separations.
4. How is the Mosaic to be used on the walls? What design are they looking for? They note on the spec sheet walls & shower floors for the mosaic. Mosaic used as design break-up.
5. Bullnose pieces must be used to finish the shower walls and top of the 57” high walls. Do you know of any room diagrams w/dimensions? Dimensions of bathrooms attached.

Changes/Additions to the bid documents:

1. Cove base is to be included and installed.
2. Please include at least 3 references in your bid package.
3. The start date will be the last week in August.

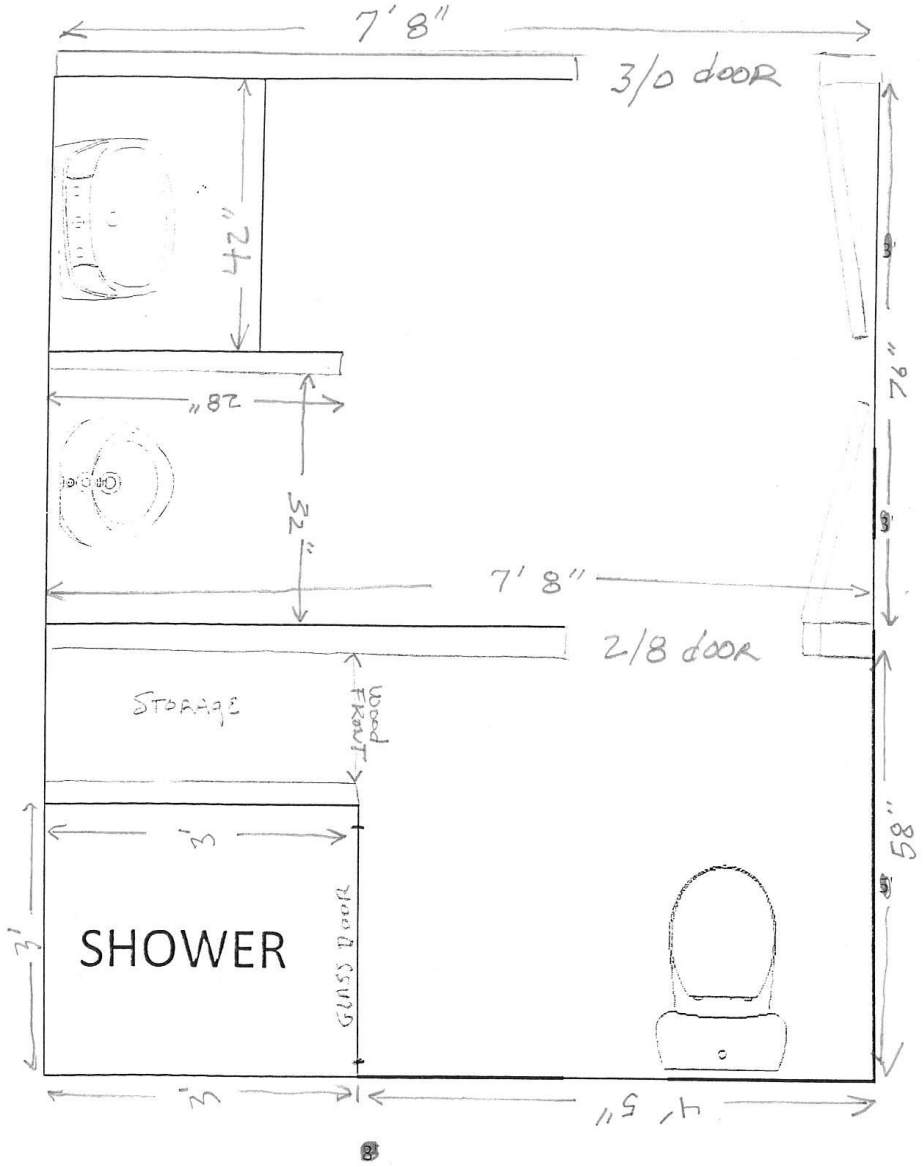

MEN's Bathroom

NOTE: 7' 2" TILE HEIGHT IN SHOWER

57" TILE Height inside BALANCE OF AREA WALLS

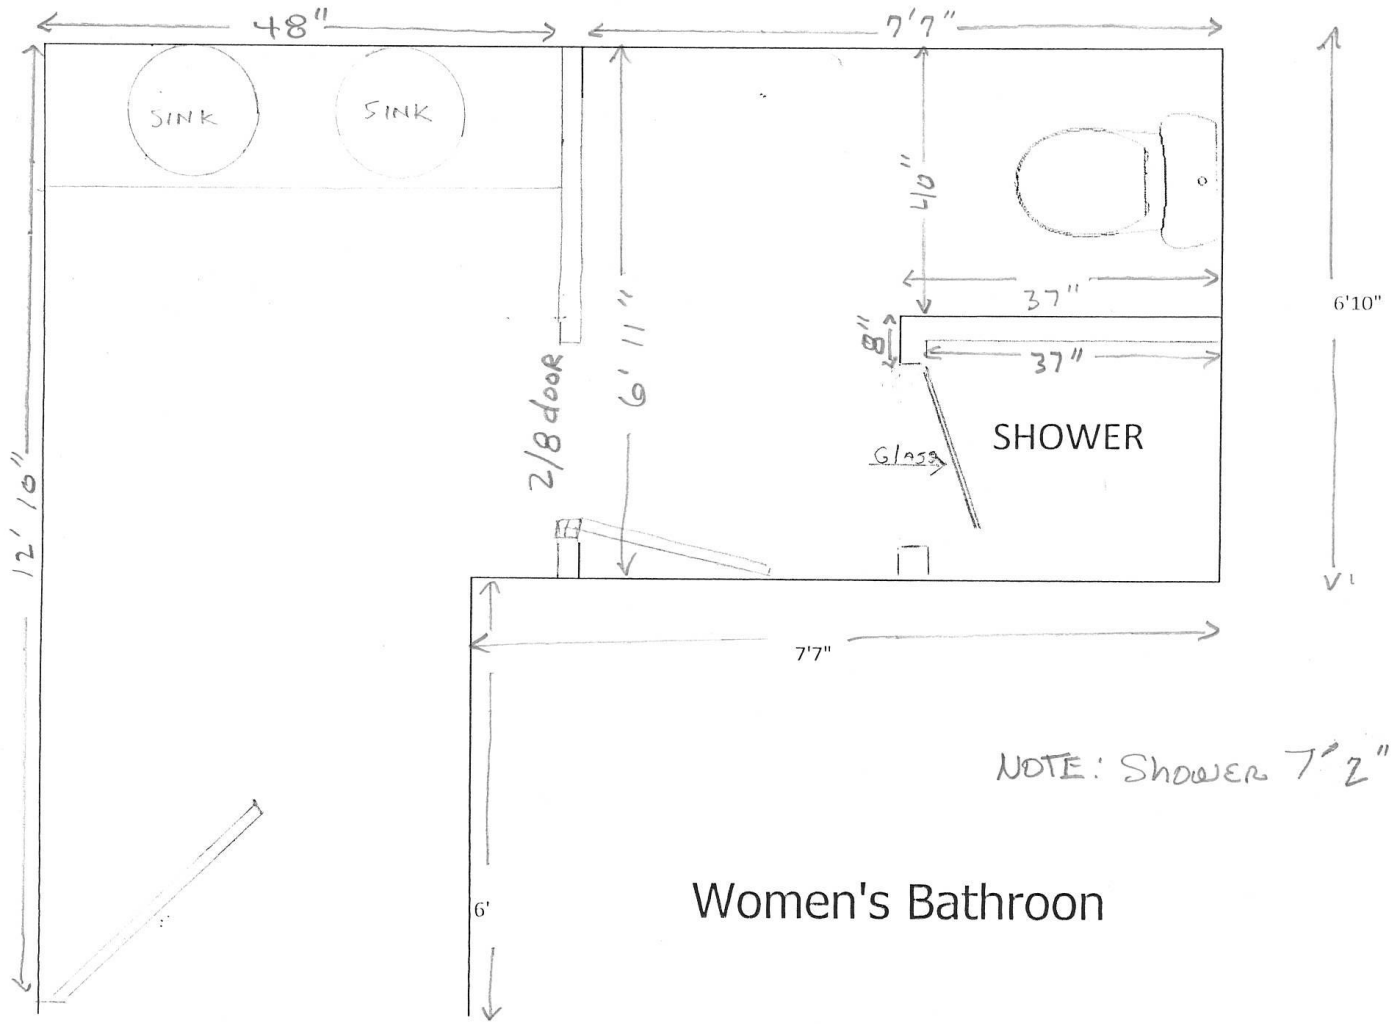

NOTE: Shower 7' 2" High

Women's Bathroom

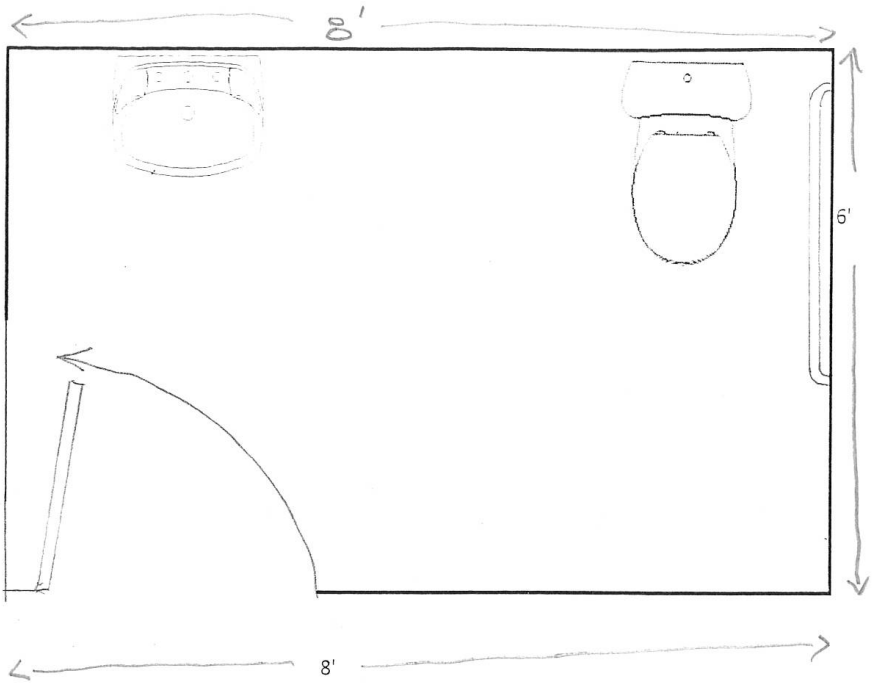

Unisex / Handicap Bathroom

WINDMERE™
GLAZED CERAMIC FLOOR & MOSAIC WITH REVEAL IMAGING®
FLOOR
INSTALLATION & PRICING
USAGE
F W C
FEATURES
IRISH BROWN W102
SCOTTISH WHITE W101 (CUT PIECES)
ENGLISH GREY W103 (CUT PIECES)
IRISH BROWN W102 MOSAIC
AMERICAN OLEAN®
PROVEN IN TILE®
AMERICANOLEAN.COM